


## HP Universal Bond Paper



HP Designjet printing system  
The complete solution

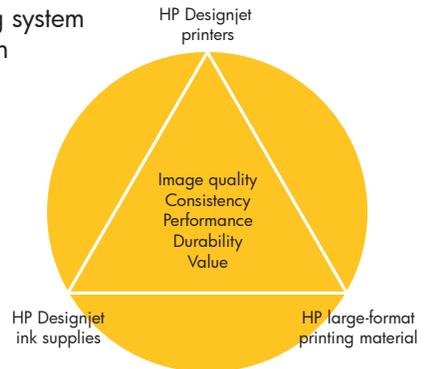

### HP Universal Bond Paper

HP Universal Bond paper is an economical paper designed for black and color line drawings. This media produces crisp line resolution and high-color contrast prints.

The HP Designjet printing solution—printer, ink supplies and media—is custom-engineered, tested and guaranteed to provide consistent, exceptional-quality results, every time.

#### Target customers

- CAD, AEC, GIS

#### Applications

- Posters and presentations
- POP and retail displays
- Geographic Information Systems (GIS)
- Architecture (AEC) and Engineering (CAD)

#### Benefits

- Produce economical line drawings and simple graphics with this highly affordable bond paper.



## Printer/ink compatibility

Printer	Ink	Front panel setting
HP Designjet 5500/5000 series	HP 81 DYE	Basic Bond
HP Designjet 3000/2000 series	HP CP DYE ink supplies	Coated Paper
HP Designjet 1000 series	HP 80 ink supplies	Bright White Inkjet Pap
HP Designjet 800/500 series	HP 10, 11, & 82 ink supplies	Bright White Inkjet Pap
HP Designjet 700 series	HP 45 black ink, HP 44 CMY ink	Opaque Bond
HP Designjet 400/300 series	HP 40 black ink, HP 44 CMY ink	Plain Paper
Encad Novajet 750/700 (line drawing)	dye and pigment inks	
Epson Stylus PRO 9000/7000 (line draw)	dye and pigment inks	

For the latest ICC/Media profiles, please visit [www.hp.com/go/designjet/supplies/support](http://www.hp.com/go/designjet/supplies/support) (click on the ICC profiles and select your printer). For non-Post Script printers see your external RIP Vendor.

## Product specifications

Property	Value	Test method
Grammage	80 g/m <sup>2</sup>	ISO 536
Basis Weight	21 lb	
Thickness / Caliper	4.2 mil / 106 µm	ISO 534
CIE Whiteness	160	CIE Ganz 82
Brightness	110	ISO 2469
Opacity	90%	ISO 2470
Finish	Matte	ASTM D-523
Country of Origin	Hungary	

## Image permanence

	Dye	UV
Lighfastness (Indoor)+	Testing	
Lighfastness (Commercial Window)	Testing	
Lighfastness (Outdoor)	Testing	
Waterfastness	Lamination required	

## Operating specifications

Operating temperature	15° - 30°C (59° - 86°F)
Operating humidity	20% - 70% Relative Humidity
Dry time	Instant (@23°C, 50% RH)
Shelf life	2 years, unopened in original packaging

## Finishing/post processing

Lamination	Can be laminated with commercially available pressure-sensitive laminate films. Visit HP's lamination partner for more information
------------	--

## Ordering information

Q1396A	24 in. x 150 ft. (610 mm x 45.7 m)	North America, Asia & Europe
Q1397A	36 in. x 150 ft. (914 mm x 45.7 m)	North America, Asia & Europe
Q1398A	42 in. x 150 ft. (1067 mm x 45.7 m)	North America, Asia & Europe

+ Information provided by Hewlett-Packard. Tested on HP Designjet 5500 with HP 81 DYE, and 83 UV inks

### Warranty Statement

Technical information contained in this document is subject to change without notice.  
 © Copyright 2004 Hewlett-Packard Development Company, L.P. Hewlett-Packard Large-Format printing materials are guaranteed to meet HP published specifications, to be free of manufacturing flaws and defects, and are designed to resist paper jams when used correctly. If you are not satisfied with this product for any reason, please visit [www.hp.com/go/designjet/supplies](http://www.hp.com/go/designjet/supplies), and select HP product support center to locate product support in your region.

For information on similar products, please visit HP Designjet Supplies at <http://www.hp.com/go/designjet/supplies>

5982-4205EN, 02/2004

