



Quantum[®] P70iX

Digital production punch

Digital punch operations have never been easier with the high-production, near-line GBC Quantum P70iX Digital Production Punch. Outstanding productivity, exceptional speed, and labor-saving features combine for a punching solution unparalleled in the industry.


Anyone in the shop can run the Quantum P70iX with a fully-digital, push-button control panel that remembers custom job setups, pre-sets standard paper sizes, and monitors operation. The user-friendly display also indicates which pins to pull for a given die set and sheet size.

Considering its low maintenance costs and savings on labor, the Quantum P70iX offers the greatest lifecycle value of any high-performance punch on the market today.



Features and benefits

- Quick, intuitive setup of jobs speeds production
- Easily handles intermixed tabs, flush covers and a wide range of stocks while keeping up with today's fastest digital print engines
- Convenient user interface identifies installed quick-change dies
- Fast, tool-free die set changeovers make switching jobs easy
- Punches up to 60,000 sheets/hour
- Local service available to minimize downtime
- Ergonomic workflow allows operators to load, unload and program from the same side
- Features fully-digital push-button setup and operation along with recall for up to 24 custom jobs
- Available punching die patterns include CombBind[®], WireBind, VeloBind[®], Color Coil[®], 3-hole and more

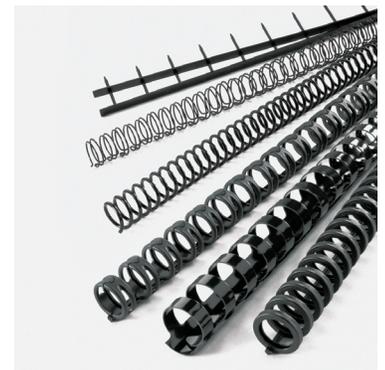

Applications

- Presentations
- Training manuals
- Proposals
- Financial reports
- Portfolios
- Product catalogs
- Handbooks
- Legal filings

Specifications


Sheet Size	Punch edge: 5½" to 12" Side edge: 5½" to 9"
Productivity	Up to 105 cycles/minute; 60,000 sheets/hour
Paper Stock	61 gsm (16 lb bond) to 300 gsm (140 lb) intermixed weights, flush-cut covers, and standard index tabs
Lift Height	Variable, 6 to 12 sheets of 20 lb bond
Capacity	Stack height up to 14" of 20 lb bond
Dimensions	60" W x 55" L x 49" H; Easily breaks down to fit through a 32" doorway
Weight	850 lbs
Power Supply	220 VAc, 60 Hz, single phase
Safety	UL/CSA/TUV

Specifications are subject to change without notification.

Die sets

Die Description	Pitch/Style	Punch Pattern	Part No.
CombBind®	19 Hole (.094)	■ ■	7708430
CombBind	19 Hole (.141)	■ ■	7708420
CombBind	19 Hole (.187)	■ ■	7707230
WireBind	3:1 Square	■ ■ ■	7708400
WireBind	2:1 Square	■ ■	7708410
WireBind	3:1 Round**	● ● ●	7708350
WireBind	2:1 Round**	● ●	7708320
Color Coil®	4:1 (0.25) Round**	● ● ● ●	7708310
Color Coil	4:1 (.2475) Round**	● ● ● ●	7708300
Color Coil	4:1 (.2475) Oversize*	● ● ● ●	7707300
ProClick®	3:1 Oversized Square	■ ■ ■	7707390
VeloBind®	11- pin**	• •	7708340
Loose-leaf	3-5-7 Hole	● ● ●	7708440
Loose-leaf	2-4 Hole**	● ●	7708390

*Compatible with GBC DigiCoil. **Non-stock dies. Contact GBC for lead times.

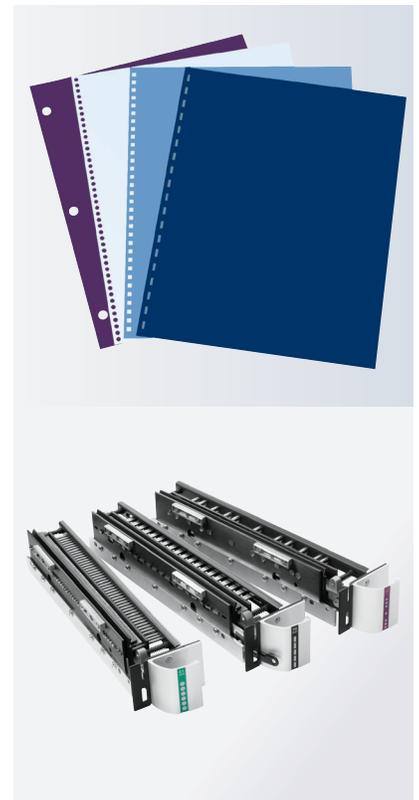

Call 800.723.4000 or visit us online at www.gbconnect.com to order or for more information.