




# HP Everyday Satin Canvas



**The HP large format printing system—the complete solution**

HP Latex and HP Scitex printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

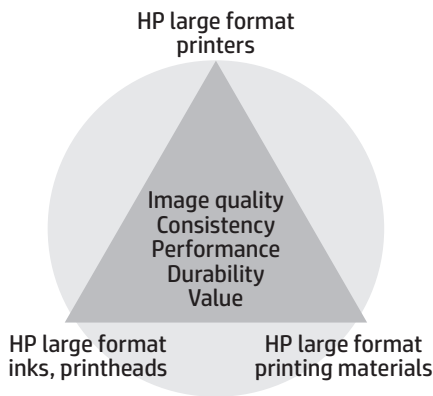

## High-quality, economical canvas for day-to-day production

**Achieve high quality at an economical price**

Ideal for décor and display work, HP Everyday Satin Canvas produces sharp detail and vivid, accurate color in a slightly-textured, satin, production-oriented canvas.

**Create durable images**

Produce prints that withstand the test of time, are acid-free with a pH-neutral base. This easy-to-handle canvas is resistant to edge cracking so that it moves quickly through post-production finishing and framing.

**Maintain an easy, smooth workflow**

To provide trouble-free printing, Original HP printing materials are designed together with HP Latex printers for consistency, performance, durability and value. Because it's scratch- and crack-resistant, it's easy to handle and moves quickly through post-print finishing, including stretching, coating and laminating.

Target customers	Applications	Benefits
Art reproduction houses	Photo enlargements	High quality, economical price
Graphics-oriented print service providers	Art reproductions	Slightly textured surface for artistic look and feel
Artists	POP displays	Sturdy, easy-to-handle substrate
Photographers		Expanded dMax and color gamut
		Acid-free, pH-neutral

## Technical specifications



### HP Everyday Satin Canvas

For the latest ICC profiles/paper presets, please see [globalBMG.com/hp/paperpresets](http://globalBMG.com/hp/paperpresets).

<b>Weight</b>	340 g/m <sup>2</sup> per ISO 536 Test Method			
<b>Thickness</b>	17.5 mil/444 microns per ISO 20534 Test Method			
<b>Opacity</b>	95 +/- 3 % per TAPPI T425 Test Method			
<b>Whiteness</b>	>77 per ISO 11475 Test Method			
<b>Finish</b>	Satin			
<b>Operating temperature</b>	20 to 55° C / 68 to 131° F			
<b>Operating humidity</b>	5 to 60% RH			
<b>Dry time</b>	Instant dry for latex inks			
<b>Shelf life</b>	2 years, unopened in original packaging			
<b>Storage temperature</b>	20 to 45° C / 68 to 113° F			
<b>Storage humidity</b>	5 to 85% RH			
<b>Country of origin</b>	Product of the United States of America			
<b>Ordering information</b>	<b>Product numbers</b>	<b>Roll sizes</b>	<b>UPC codes</b>	<b>Region</b>
	E4J30A	762 mm x 22,9m (30 in x 75 ft)	848412012606	Worldwide
	E4J31A	914 mm x 22,9m (36 in x 75 ft)	848412012613	Worldwide
	E4J32A	1372 mm x 22,9m (54 in x 75 ft)	848412012620	Worldwide
	E4J33A	1524 mm x 22,9m (60 in x 75 ft)	848412012637	Worldwide
<b>Warranty</b>	BMG large format printing materials are free from defects in materials and workmanship. For warranty statement, please see <a href="http://globalBMG.com/hp/MediaWarranties">globalBMG.com/hp/MediaWarranties</a> . To obtain warranty service, please contact BMG customer support.			

For detailed information on the HP large format printing materials portfolio and to order, see [globalBMG.com/hp/](http://globalBMG.com/hp/)

Sign up for updates  
[globalBMG.com/hp/getupdated](http://globalBMG.com/hp/getupdated)



Share with colleagues



Rate this document

© Copyright 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Trademark acknowledgements if needed.

4AA4-9390ENW, June 2014

